

Машинный перевод документа Noblelift


Noblelift PS16N, PS20N, PS12N

Брошюра / Каталог


Документ переведён с английского языка автоматически. Перевод может содержать неточности. Для проверки технических данных используйте оригинал документа на английском языке.

Оригинал: официальный документ Noblelift


Тип	PS 12N
Мачта	2900

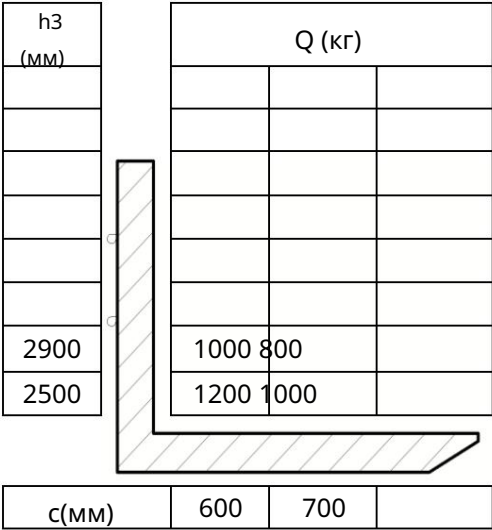


Тип	PS 12N
Мачта	3200

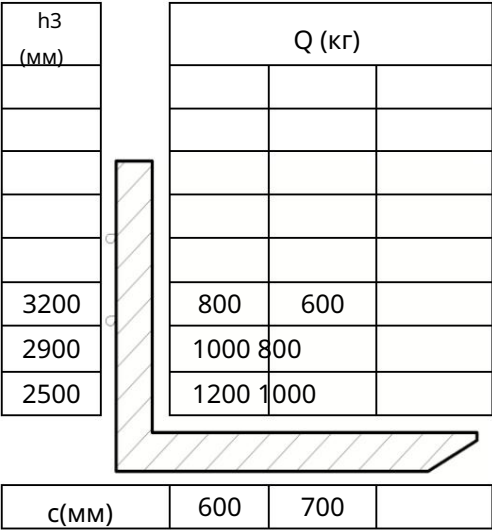


Тип	PS 12N
Мачта	3600

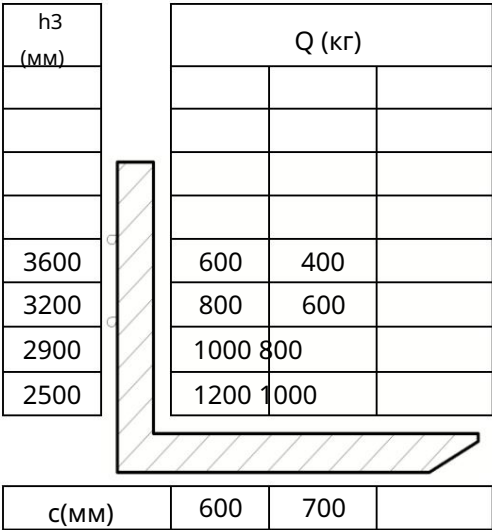


Тип	ПС 16Н
Мачта	2900

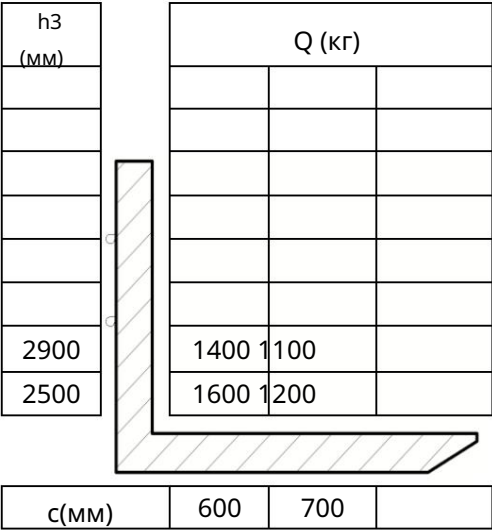


Тип	ПС 16Н
Мачта	3200

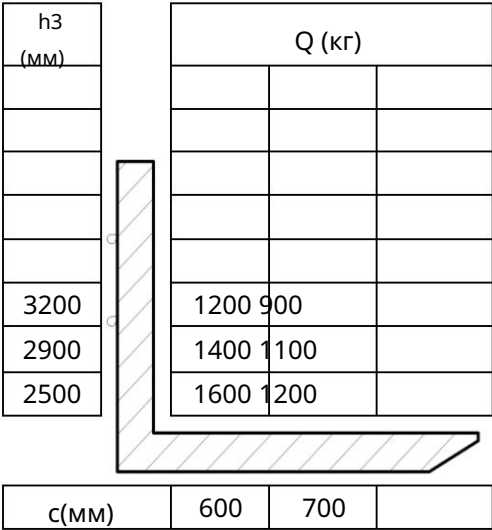


Тип	ПС 16Н
Мачта	3400

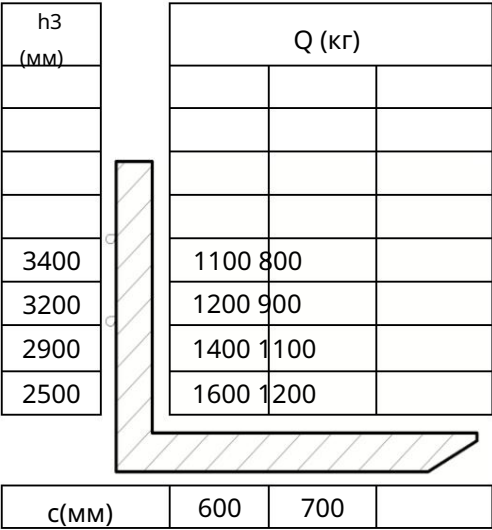


Тип	ПС 16Н
Мачта	3600

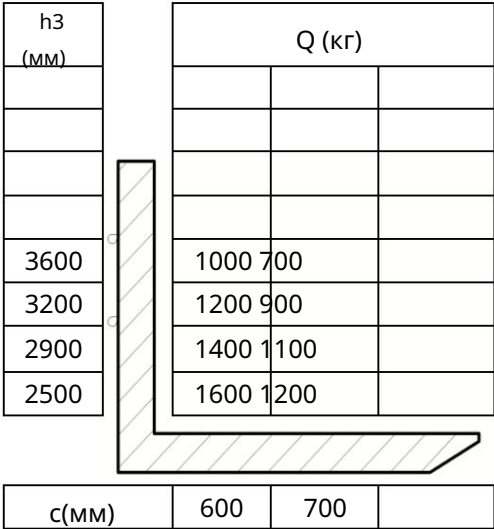


Тип	ПС 16Н
Мачта	4000

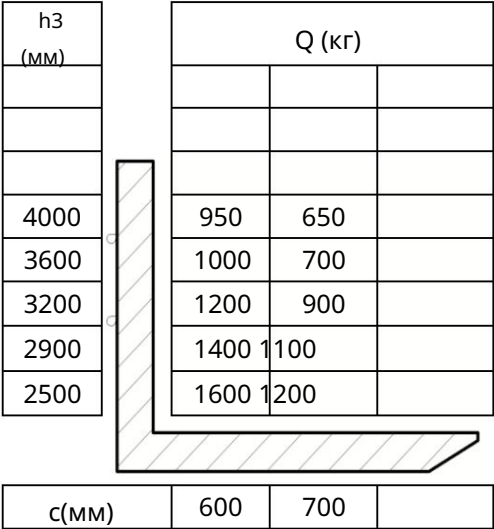


Тип	PS 16N
Мачта	4300

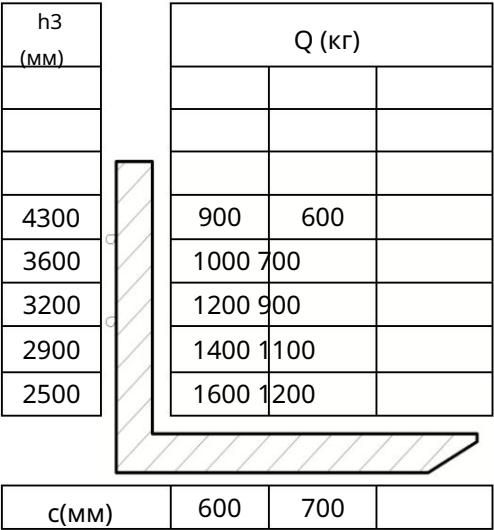


Тип	PS 16N
Мачта	4600

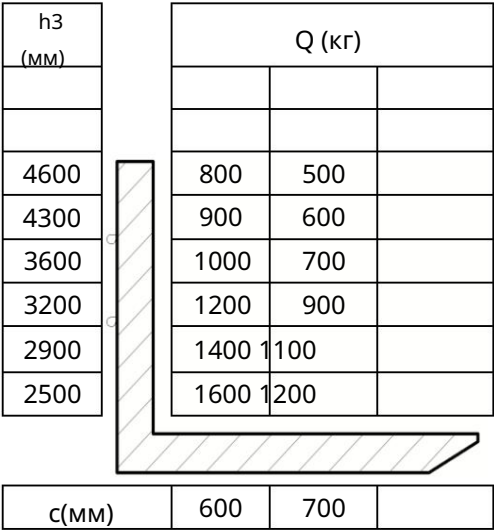


Тип	ПС 16Н
Мачта	5300

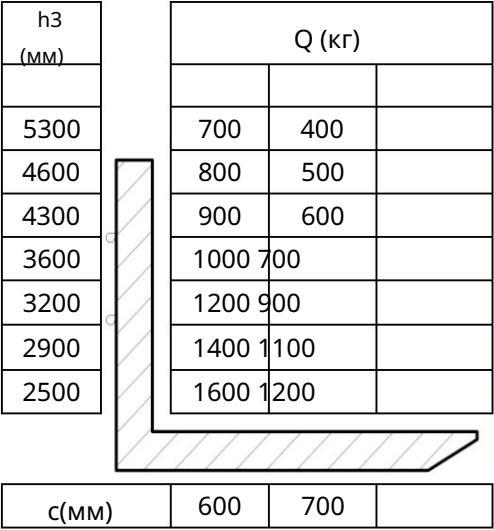


Тип	ПС 16Н
Мачта	5500

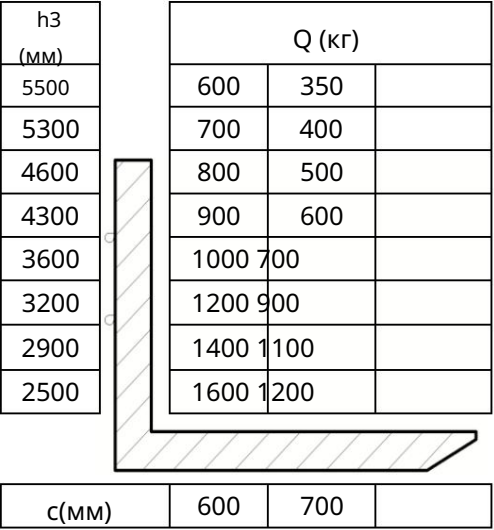


Тип	PS 20N
Мачта	2700

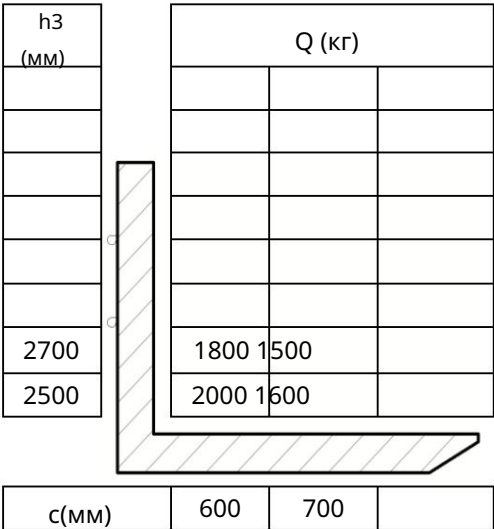


Тип	PS 20N
Мачта	2900

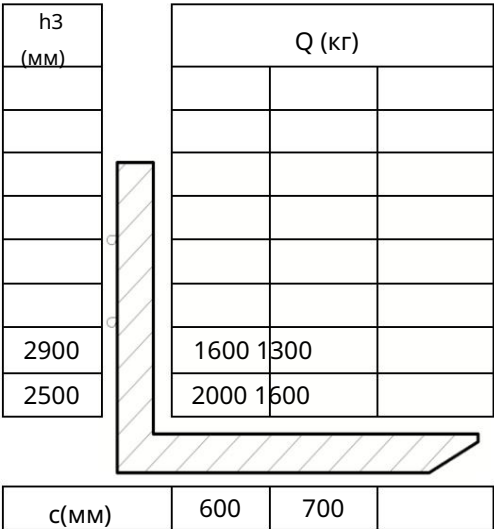


Тип	PS 20N
Мачта	3200

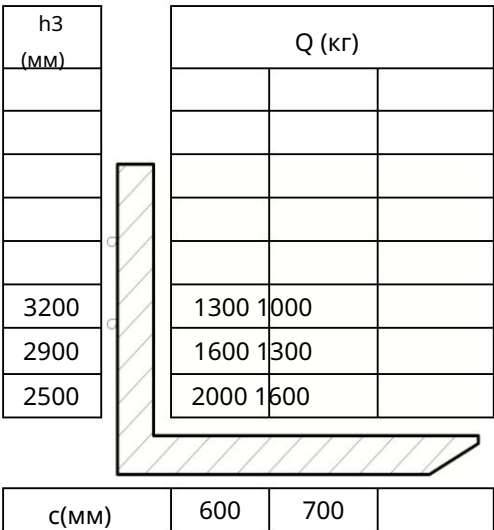


Тип	PS 20N
Мачта	3600

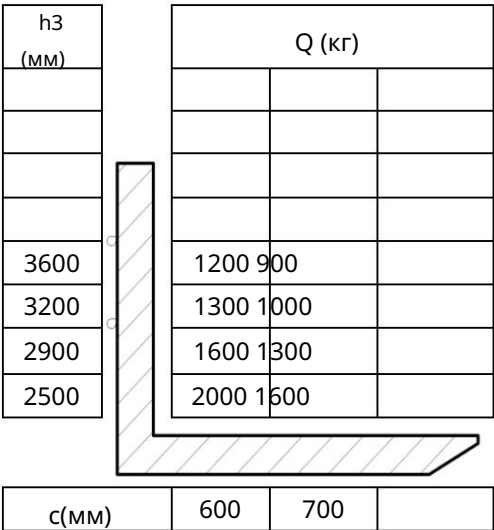

Тип	PS 20N
Мачта	4000

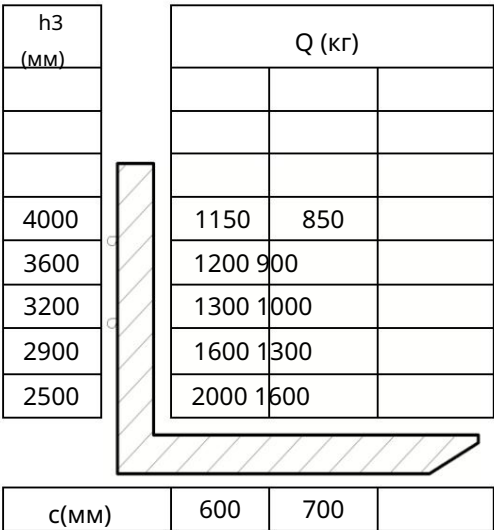


Тип	PS 20N
Мачта	4300

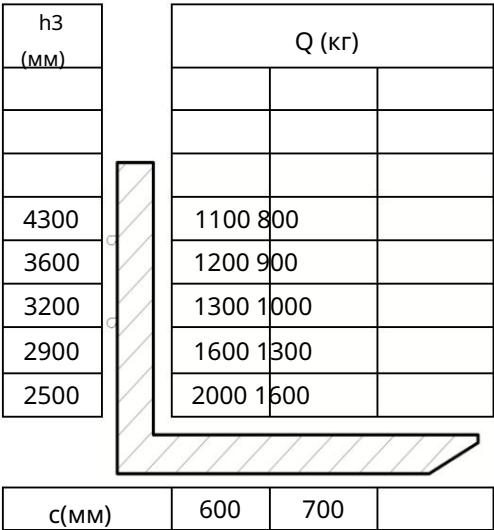

Тип	PS 20N
Мачта	4600

h3 (мм)	Q (кг)		
4600	1000	700	
4300	1100	800	
3600	1200	900	
3200	1300	1000	
2900	1600	1300	
2500	2000	1600	

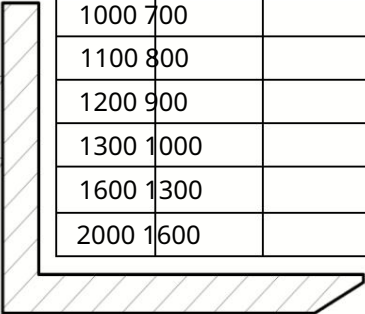

The technical drawing shows a vertical bracket with a horizontal base. The vertical part has a width of 600 mm and a height of 4600 mm. The horizontal base has a width of 700 mm and a height of 2500 mm. The drawing is filled with diagonal hatching. The table to the right of the drawing provides the load capacity (Q) in kg for different heights (h3) in mm. The load capacity increases as the height decreases.

с(мм)	600	700	
-------	-----	-----	--