

Машинный перевод документа Noblelift

Noblelift PSE15L-C2


Брошюра / Каталог

Документ переведён с английского языка автоматически. Перевод может содержать неточности. Для проверки технических данных используйте оригинал документа на английском языке.

Оригинал: официальный документ Noblelift

Тип	PSE15L-C2
Мачта	1600


h3+h13 (мм)	Q (кг)		
1600	1500	1100	
c(мм)	600	700	

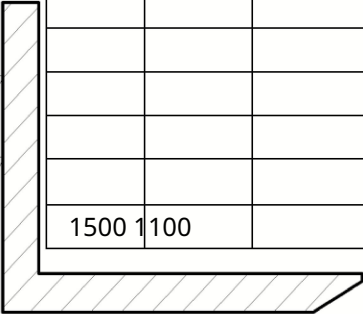

The diagram shows an L-shaped bracket. The vertical leg has a height of 1600 mm. The horizontal leg has a width of 600 mm. The bracket is shown with diagonal hatching to indicate its profile. Two small circles are visible on the vertical leg, likely representing mounting holes. The table provides load capacity (Q in kg) for different dimensions (h3+h13 and c).

Тип	PSE15L-C2
Мачта	2000

h3 (мм)	Q (кг)		
2000	1500	1100	

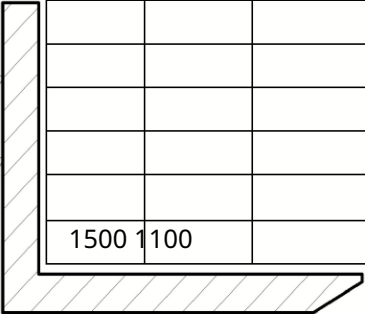

The technical drawing shows a corner bracket with a vertical leg and a horizontal leg. The vertical leg has a height of 2000 mm. The horizontal leg has a width of 1500 mm. The bracket is shown in a perspective view with hatching on the vertical leg and the horizontal leg. The table to the right of the drawing provides the load capacity (Q) in kg for different heights (h3) in mm. The load capacity is 1500 kg for h3 = 2000 mm and 1100 kg for h3 = 1500 mm. The table has 9 rows and 4 columns. The first row is the header. The last row contains the values 1500, 1100, and an empty cell.

c(мм)	600	700	
-------	-----	-----	--

Тип	PSE15L-C2
Мачта	2600

h3 (мм)	Q (кг)		
2600	1300	1000	
2500	1500	1100	



The technical drawing shows a corner bracket with a vertical leg and a horizontal leg. The vertical leg has two mounting holes. The horizontal leg has a sloped end. The dimensions and load capacity are specified in the table above.

c(мм)	600	700	
-------	-----	-----	--

Тип	PSE15L-C2
Мачта	2900


h3 (мм)	Q (кг)		
2900	1200	1000	
2500	1500	1100	



c(мм)	600	700	
-------	-----	-----	--

Тип	PSE15L-C2
Мачта	3200


h3 (мм)	Q (кг)		
3200	1000	800	
2900	1200	1000	
2500	1500	1100	

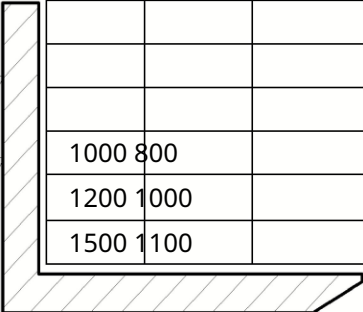

c(мм)	600	700	
-------	-----	-----	--

Тип	PSE15L-C2
Мачта	3600

h3 (мм)	Q (кг)		
3600	800	600	
3200	1000	800	
2900	1200	1000	
2500	1500	1100	

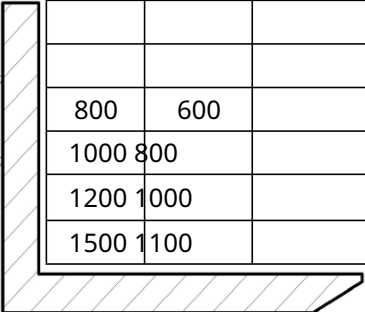

c(мм)	600	700	
-------	-----	-----	--